Canon

Canon EOS R8 + RF 24-50mm F4.5-6.3 IS STM Kit MILC 24,2 MP CMOS 6000 x 4000 Pixel Nero

Marchio : Canon   **Famiglia del prodotto:** EOS   **Codice prodotto:** 5803C013
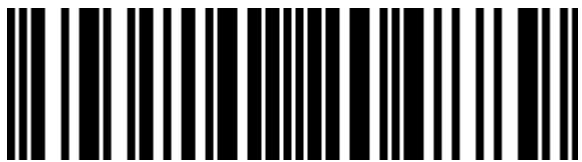
Nome del prodotto : EOS R8 +
RF 24-50mm F4.5-6.3 IS STM Kit

EOS R8 e obiettivo RF 24-50mm F4.5-6.3 IS STM
Canon EOS R8 + RF 24-50mm F4.5-6.3 IS STM Kit. Tipologia fotocamera: MILC, Megapixel: 24,2 MP, Tipo sensore: CMOS, Risoluzione massima immagine: 6000 x 4000 Pixel. Sensibilità ISO (max): 204800. Lunghezza focale: 24 - 50 mm. Velocità massima dell'otturatore della fotocamera: 1/16000 s. Wi-Fi. Tipologia HD: 4K Ultra HD, Risoluzione massima video: 3840 x 2160 Pixel. Touch screen. Tipo di mirino: Elettronico. Peso: 414 g. Colore del prodotto: Nero

Picture quality

Image sensor aspect ratio	3:2
Camera type *	MILC
Megapixel (approx.) *	24.2 MP
Sensor type *	CMOS
Sensor cleaning system	Ultrasonic vibration
Maximum image resolution *	6000 x 4000 pixels
Still image resolution(s) *	6000 x 4000, 3984 x 2656, 2976 x 1984, 2400 x 1600, 5328 x 4000, 3552 x 2664, 2656 x 1992, 2112 x 1600, 4000 x 4000, 2656 x 2656, 1984 x 1984, 1600 x 1600
Image stabilizer *	✘
Supported aspect ratios	1:1, 3:2, 4:3, 16:9
Image sensor size (W x H)	35.9 x 23.9 mm
Sensor format	Full-frame
Built-in low-pass filter	✔
Image formats supported *	JPEG, RAW, C-RAW, HEIF

Lens system

Focal length range	24 - 50 mm
Minimum focal length (35mm film equiv)	24 mm
Maximum focal length (35mm film equiv)	50 mm
Minimum aperture number	32
Maximum aperture number	4.5
Lens structure (elements/groups)	8/8
Lens type	Standard zoom
Filter size	58 mm
Number of diaphragm blades	7
Lens mount interface	Canon RF

Focusing

Focus *	TTL
Focus adjustment *	Auto/Manual
Auto focusing (AF) modes *	Continuous Auto Focus, One Shot Focus, Servo Auto Focus
Auto Focus (AF) object detection	Animal, Bird, Eye, Face, People, Vehicle

Display

Vari-angle LCD display	✔

Viewfinder

Viewfinder type	Electronic
Magnification	0.7x
Viewfinder screen size	0.39"
Viewfinder frame rate (power saving mode)	60 fps
Viewfinder frame rate (smooth mode)	120 fps
Viewfinder resolution (approx.)	2360000 pixels

Ports & interfaces

USB version *	3.2 Gen 2 (3.1 Gen 2)
USB connector	USB Type-C
HDMI *	✔
HDMI connector type	Micro
Microphone in	✔
Headphone outputs	1
Headphone connectivity	3.5 mm

Network

Bluetooth *	✔
Bluetooth version	4.2
Bluetooth Low Energy (BLE)	✔
Wi-Fi *	✔
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)

Camera

White balance *	Auto, Cloudy, Custom modes, Daylight, Flash, Fluorescent, Manual, Shade, Tungsten
Scene modes *	Children, Close-up (macro), Food, Landscape, Panorama, Portrait, Self-portrait, Sports
Shooting modes *	Aperture priority, Auto, Flexible priority, Manual, Program, Scene, Shutter priority
Self-timer delay *	2,10 s

Focusing

Face tracking	✔
Auto Focus (AF) lock	✔
Auto Focus (AF) assist beam	✔

Exposure

ISO sensitivity (min) *	50
ISO sensitivity (max) *	204800
ISO sensitivity	100, 6400, 25600, 102400
Light exposure modes *	Aperture priority AE, Auto, Manual, Shutter priority AE
Light exposure control	Program AE
Light exposure correction *	± 3EV (1/2EV; 1/3EV step)
Auto Exposure (AE) lock	✔
Number of measurement zones	384

Shutter

Fastest camera shutter speed *	1/16000 s
Slowest camera shutter speed *	30 s
Camera shutter type	Electronic

Flash

Flash exposure lock	✔
External flash connector	✔
Flash exposure compensation	✔
Flash exposure correction	±3EV (1/3 EV step)
Shoe mounting point	✔
Shoe mounting point type	Hot shoe

Video

Video recording *	✔
Maximum video resolution *	3840 x 2160 pixels
HD type *	4K Ultra HD
Video resolutions	1920 x 1080,3840 x 2160 pixels
Video formats supported	H.264, H.265
Colour sampling	YCbCr4:2:0 8-bit, YCbCr4:2:2 10-bit

Audio

Built-in microphone *	✔
Built-in speaker(s)	✔
Audio system	stereo
Wind filter	✔
Audio formats supported	LPCM, AAC

Memory

Compatible memory cards *	SD, SDHC, SDXC
Memory slots	1

Display

Display *	LCD
Touchscreen *	✔
Display diagonal (metric)	7.5 cm
Display resolution	1620000 dot
Display aspect ratio	3:2

Camera

Dioptre correction	✔
Diopter adjustment (D-D)	-4 - 1
Histogram	✔
Live view	✔
Direct printing	✔
GPS (satellite)	✘
Orientation sensor	✔
Anti-dust function	✔
Smartphone/tablet remote support	✔
View on smartphone	✔
Histogram options	Brightness, RGB
Highlight alert	✔
Tripod mounting supported *	✔
Image processor	DIGIC X

Design

Product colour *	Black
Dustproof	✔
Splash proof	✔

Battery

Battery technology *	Lithium-Ion (Li-Ion)
Battery type	LP-E17
Number of batteries supported	1
Battery level indicator	✔

Power

USB Type-C charging port *	✔
USB Type-C required charging power (min) *	7.5 W
USB Type-C required charging power (max) *	7.5 W

Operational conditions

Operating temperature (T-T)	0 - 40 °C

Weight & dimensions

Width	132.5 mm
Depth	70 mm
Height	86.1 mm
Weight	414 g
Weight (including battery)	461 g

Packaging data

Quantity per pack	1 pc(s)
Package width	192 mm
Package depth	282 mm
Package height	153 mm
Package weight	1.41 kg

Packaging content

Neck strap included	✔
AC adapter included *	✘
Battery charger included	✔
Batteries included	✔

Logistics data

Products per pallet	72 pc(s)

4549292204889